
SOFTEYE ROUND



size

view



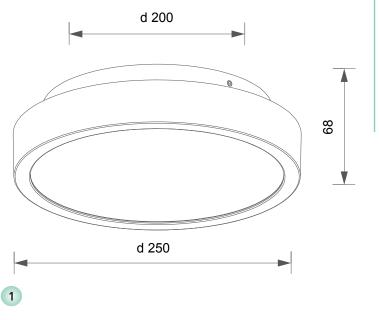













SOFTEYE ROUND

LED outdoor ceiling-wall lighting 18W, IP65.

The luminaire is a compact and convenient solution for floodlighting and accentual lighting of entry elements. Suitable for use as outdoor lighting instead of devices with gas-discharge lamps. The driver and the power supply are located inside the housing.

Housing:	Pressure die-cast aluminum alloy with polyester powder paint.			
	Body and glass are fitted with silicone sealants.			
Fasteners:	Stainless steel, T=2.00mm			
Glass:	tempered glass, 3.0 mm			
Optical system:	Optical lens. Efficiency >85%			
Optics with angles:	109°.			
Housing color:	Black, Grey, White			
Operating temperature:	-40°C - +45°C (at startup: -20°C)			
Weight:	1.78 kg			
Number of diodes (monochromatic):	100			

Article	Name	Power, W	Dimensions, mm	Beam angle°	Light flow, lm	Color rendering index	Power factor (PF)
69505010	SoftEye Round 18W 4000K 220V IP65	18 W	250 x 68	109°	1120 lm	74	0,96