

GLOWHEAD XL



view



RAL




1 overall dimensions



size

1

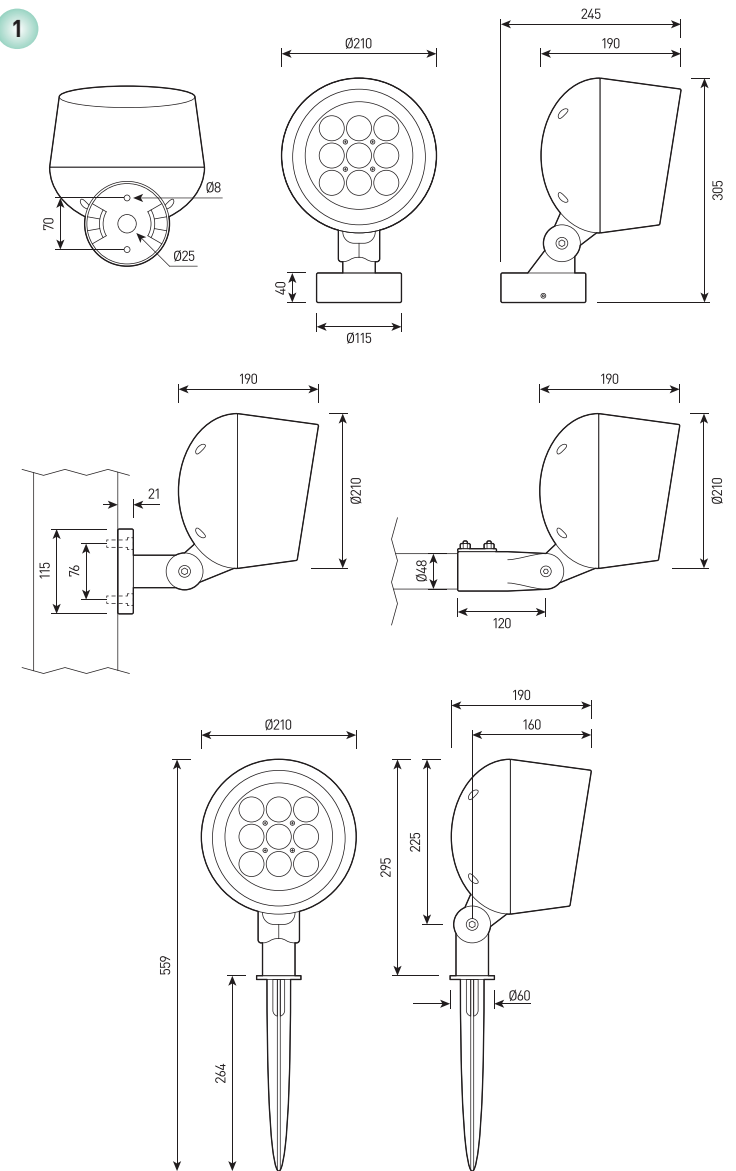

GLOWHEAD XL

Multifunctional floodlight with integrated liquid cooling system

Housing:	Pressure die-cast aluminum alloy with polyester powder paint
Beam angle:	2.5°, 6°, 9°, 12°, 15°, 20°, 30°, 45°, 60°, 15x60°, 10x70°, 5x20°
Housing color:	Black, Grey, RAL
IES protection classes:	Class I (SELV)
Color temperature:	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B, RGBW 4in1
Input voltage:	36V, 220V
Control system:	On/Off, DMX-512, 0-10V, DALI
Ingress Protection Rating, IP:	IP66
Operating temperature:	-40°C ~ +50°C
Weight, kg:	3.7 kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
622201166	GLOWHEAD XL 60W 220V SINGLE IP66	60W	210x305x245	220V	2.5°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	3.7
622201168	GLOWHEAD XL 70W 220V SINGLE IP66	70W	210x305x245	220V	6°, 12°, 20°, 30°, 45°, 60°, 10x70°, 5x20°	2700K, 3000K, 4000K, 5000K, 5700K, R, G, B	3.7
622201170	GLOWHEAD XL 80W 220V DMX-512 RGBW IP66	80W	210x305x245	220V	2.5°	RGBW 4in1	3.7
622201172	GLOWHEAD XL 100W 36V/220V DMX-512 RGBW 4in1 IP66	100W	210x305x245	36V, 220V	9°, 15°, 20°, 30°, 45°, 15x60°	RGBW 4in1	3.7