



view



RAL

size

1 overall dimensions

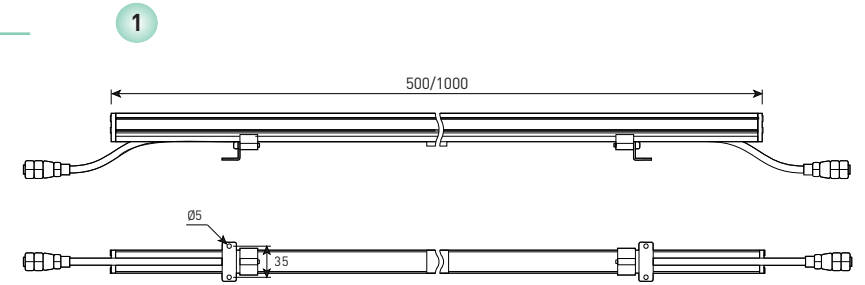

MITCH

Compact linear luminaire for architectural lighting

Housing:	Extruded aluminum with a protective anti-corrosion coating
Beam angle:	20°, 30°, 45°, 60°, 20x40°, 120°
Housing color:	Black, Metallic, RAL
IES protection classes:	Class III (SELV)
Color temperature, K:	2700K, 3000K, 4000K, 5700K, R, G, B, RGB 3in1, RGBW 4in1
Input voltage, V:	24V
Control system:	On/Off, DMX-512
Ingress Protection Rating, IP:	IP65
Operating temperature:	-40°C ~ +50°C
Weight, kg:	0.5 - 1.0kg

Article	Name	Power, W	Dimensions, mm	Input voltage, V	Beam angle, degrees	Color temperature, K	Weight, kg
744080058	MITCH 10W 1000mm 24V IP65 SINGLE COLOR	10W	1000x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	1.0
744080059	MITCH 5W 500mm 24V IP65 SINGLE COLOR	5W	500x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0.5
744080060	MITCH 10W 1000mm RGB 3in1 DMX-512 24V IP65	10W	1000x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGB	1.0
744080061	MITCH 5W 500mm RGB 3in1 DMX-512 24V IP65	5W	500x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGB	0.5
744080062	MITCH 10W 1000mm RGBW 4in1 DMX-512 24V IP65	10W	1000x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGBW	1.0
744080063	MITCH 5W 500mm RGBW 4in1 DMX-512 24V IP65	5W	500x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGBW	0.5
744080064	MITCH 15W 1000mm 24V IP65 SINGLE COLOR	15W	1000x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	1.0
744080065	MITCH 7.5W 500mm 24V IP65 SINGLE COLOR	7.5W	500x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	2700K, 3000K, 4000K, 5700K, R, G, B	0.5
744080066	MITCH 15W 1000mm RGB 3in1 DMX-512 24V IP65	15W	1000x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGB	1.0
744080067	MITCH 7.5W 500mm RGB 3in1 DMX-512 24V IP65	7.5W	500x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGB	0.5
744080068	MITCH 15W 1000mm RGBW 4in1 DMX-512 24V IP65	15W	1000x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGBW	1.0
744080069	MITCH 7.5W 500mm RGBW 4in1 DMX-512 24V IP65	7.5W	500x45x53	24V	20°, 30°, 45°, 60°, 20x40°, 120°	RGBW	0.5